




INTERNAL CONSTRUCTION FEASIBILITY REVIEW

08/11/25

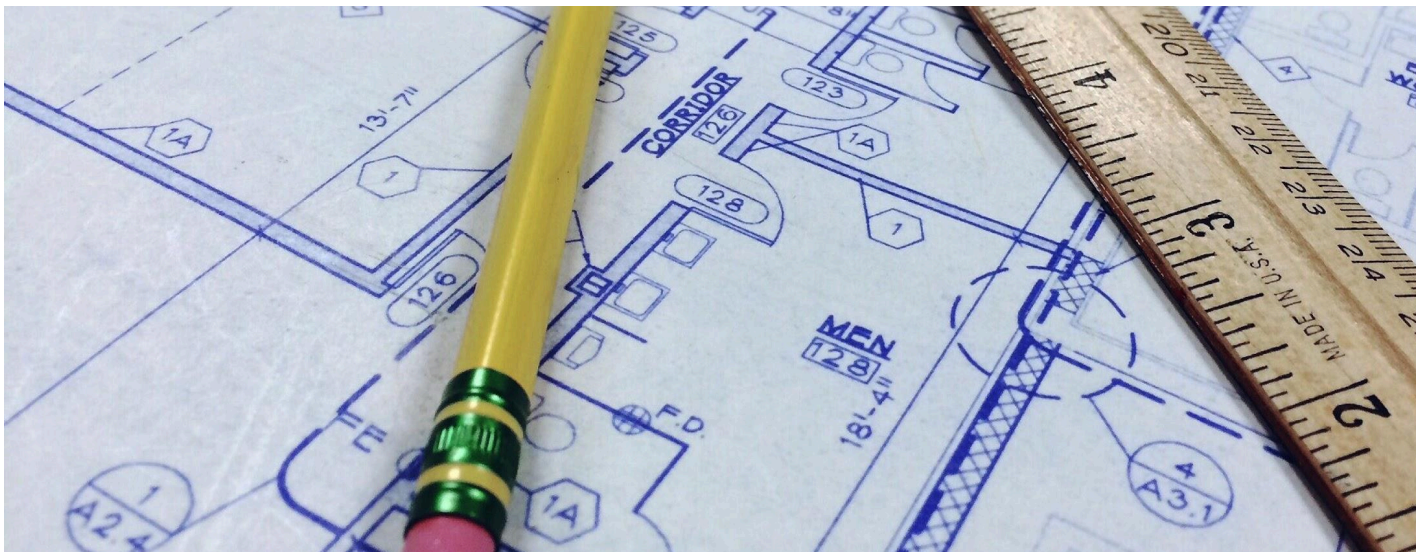

**12750 Moorpark Street (Studio City Area) Los Angeles,
CA 91604**

Sponsor:	FCM Investments
Borrowing Entity:	Tital Builders LLC
Approval status:	Approved
Report by:	Cynthia Moreno, Construction Underwriting

Executive Summary

Lusine Babloyan is Principal of FCM Investments. She has been developing large scale multi family properties for almost 10 years, and her father is also a large scale developer with over 20 years experience. She also partners with David Hirsch as her GC, who is an existing Genesis Sponsor with Midos Development.

This report is for the proposed construction of The Moorpark Apartments located on Moorpark St in Studio City, CA. The plan details the design and construction of a new 5-story, 51-unit, 100% affordable housing development. It includes comprehensive architectural drawings -cover sheets, site plans, floor plans for all levels, enlarged unit and common area layouts, elevations, building sections, construction details, accessibility notes. The unit counts include a mix of studio, one-bedroom, and single three-bedroom units; rooftop and mid-level common open spaces; no on-site parking; and exterior finishes of smooth stucco, fiber cement siding panels, and decorative metal balcony railings. FCM Investments will be using an experienced GC, MID construction with a GMP \$8,262,368.38. At the moment, the Construction Underwriting Department has a draw hold for Sub Contracts through Drywall with 0% of trades bought out.

The Genesis Construction team has obtained a third-party feasibility, which has found overall cost to be reasonable. Therefore, the Genesis Capital Construction Department is in full support of funding this loan and feels that the Sponsor is proficient, knowledgeable and utilizing all appropriate resources to complete the project without issues.

The Genesis Capital Construction Department has received and reviewed a third-party feasibility from Trinity. The report concluded that the overall project risk rating is appropriate for the scope of work and meets best practice and is Recommended for Approval. The Genesis Capital Construction Department has reviewed all pertinent construction documents provided by the Sponsor and agrees with the third-party feasibility and has Approved the loan.

The overall project timeline is estimated to be 22 months with 21 months remaining and is deemed appropriate to substantially complete the subject project based on the Sponsor's track record and market standards.

For further analysis and additional information on the project, please see subsequent third-party review.

The Construction Department is draw holding for the following: Approved Permits, Subcontractor Contracts, Construction Timeline

Loan Summary

Loan Type:	Ground-up Construction
Rehab Amount:	\$9,521,641.78
Construction Holdback:	\$9,521,641.78
Project Cost per Square Foot (GSF):	\$374.74
Project Cost per Structure:	\$9,521,641.78
Project Cost per Unit:	\$186,698.86
Total Contingency Included:	7.0%
Project Complete Percentage:	
Budget Determination:	The budget presented accurately reflects the scope of the project and the cost allocations have been determined to meet the minimum threshold to complete.

Additional Comments:

None

Plan Status:

City approved - The plans received are sufficient to support the project scope as needed.

Permits Status:

The borrower has not yet obtained permits for this loan.

Permit Timeline:

Sponsor plans to have permits within 30 days after the funding of the loan.

Finished Product Details

Property Description:

Multifamily building in Los Angeles, CA

Number of Units:

51

Number of Stories:

Five-story

Gross Buildable SF:

25,409.00



Project Review

G25079997 - 12750 Moorpark
Street

PROJECT

12750 Moorpark Street
Studio City, CA 91604

Loan#: G25079997 - 12750
Moorpark Street

LENDER

Genesis Capital

Ordered by: Construction UW

BORROWER

Lusine Babloyan

BUILDER

This document may contain proprietary information. Please do not reveal any of its contents to anyone not directly responsible for evaluating it without first obtaining written permission from Trinity Inspection Services, LLC. © 2013 Trinity Inspection Services, LLC. Trademarks, Service marks, Copyrights are the property of TRINITY INSPECTION SERVICES, LLC. Business processes, technology or programming code may be protected under a U.S. Patent, Patent Pending or Registered Copyright. Additionally, this service is provided exclusively by Trinity Inspection Services, LLC and is EXCLUSIVELY responsible and liable for the scope of work to be completed, terms of the original contract, work flow processes, service levels, productivity measures, timelines, deliverables and all acts and/or omissions associated with this particular service.



1 Summary

Project Name	G25079997 - 12750 Moorpark Street
Project Address	12750 Moorpark Street Studio City CA 91604
Scope of Work	New Construction Project Review
Lender	Genesis Capital

Good afternoon, Fund Control Team!

I hope the Team is all well today!

This is our report for the proposed construction of The Moorpark Apartments located on Moorpark St in Studio City, CA. The plan set details the design and construction of a new 5-story, 51-unit, 100% affordable housing development. It includes comprehensive architectural drawings—cover sheets, site plans, floor plans for all levels, enlarged unit and common area layouts, elevations, building sections, construction details, accessibility notes. Notable features include a mix of studio, one-bedroom, and a single three-bedroom unit; rooftop and mid-level common open spaces; no on-site parking; and exterior finishes of smooth stucco, fiber cement siding panels, and decorative metal balcony railings.

The Project Drawings include an Architectural set of Plans, Structural, and Landscape. All the pages provided for review are dimensioned and could reasonably be assumed to represent the proposed construction. No Specifications for finishes were provided for review. Therefore, 'Builder Grade' finishes are assumed.

The Total Project Budget equals \$9,097,735.44 and includes some Soft Costs, Municipal Fees, Consultant Costs and Hard Costs. Our line-item analysis of the Cost Breakdown for this project shows that no line items appear to be LOW/HIGH compared to similarly scoped projects

The primary Metrics I track for comparable Multi-Family Construction are Cost per Square Foot and Cost per Unit. The Metrics for this build is \$459.48/Sq Ft and \$178,386.97/Unit. Both metrics appear to be adequate for the Studio City, CA Market.

The line-item analysis appears to be mostly reasonable. Combined with the achievable metrics. I believe this project presents little risk to the Lender.

Upon review, if you or a member of your Team have any questions about this report, please let me know. Otherwise, we thank you for partnering with Trinity and wish you luck moving forward!

Kindest Regards,

Samson Marques
Operations Manager-Commercial



2 Executive Summary

1 GEOTECHNICAL REPORT

No Soils Report was provided for review. However, the Soils Report Approval Letter in the plan set provided for review notes Report #22-366-02 dated 09/26/2023 prepared by Applied Earth Sciences

2 PLANS AND CONTRACTS DOCUMENTS

CIVIL DRAWINGS

No Civil plans provided for review.

LANDSCAPE DRAWINGS

Landscape Plans:

Planting, irrigation, and construction details (LP-1, LI-1 to LI-5)

STRUCTURAL DRAWINGS

Structural Plans prepared by Garcia Castro & Associates out of Chula Vista, CA (Project # 2023-05) were provided for review.

The set provides structural construction details, schedules, and specifications to support the architectural plans. It includes concrete, framing, shear wall, and connection details to guide proper fabrication and installation.

The structural design for this project is based on the 2019 California Building Code (CBC) and is classified as Occupancy Category II, Risk Category II. Wind design parameters include a basic wind speed of 110 mph, Exposure B, Seismic Design Category D, Site Class D. The allowable soil bearing pressure is 1,500 psf. Live loads (LL): dwelling unit floors 40 psf; corridors/lobbies 100 psf (if public/common); balconies 60 psf; stairs 100 psf; roof 20 psf.

Allowable Soil Bearing Pressure: 1,500 psf (per geotechnical report or CBC default)

Concrete: 3,000 psi compressive strength at 28 days

Reinforcing Steel: ASTM A615 Grade 60

Structural Steel: ASTM A36 (Fy = 36 ksi) unless noted otherwise

Framing Lumber: Douglas Fir-Larch No. 2 or better, Fb = 1,000 psi minimum, unless otherwise specified

Plywood Sheathing: Structural I, Exposure 1, per PS 1-09

ARCHITECTURAL DRAWINGS

Architectural Drawings prepared by JZA Architecture out of Culver City, CA (Project # 2213) were provided for review.

The Architectural Site Plans show 51 Total Units with three different Unit Types: Studios, 1-Bedroom, and 3-Bedroom (Studios: 13, 1-Bedroom:



37, and 3-Bedroom: 1) Total Unit Area: 19,800 SF.

The First Level Floor Plan shows (7 Units) Studios: 1 unit, 1-Bedroom: 5 units, 3-Bedroom: 1 unit. Total Bedrooms: 7 (1x3BR = 3, plus 5x1BR = 5, plus studios = 0) Total Unit Area: 3,005 SF

The Second Level Floor Plan shows (11 Units) Studios: 3 units, 1-Bedroom: 8 units, Total Bedrooms: 11. Total Unit Area: 4,198 SF

The Third Level Floor Plan shows (11 Units) Studios: 3 units, 1-Bedroom: 8 units, Total Bedrooms: 11. Total Unit Area: 4,197 SF

The Fourth Level Floor Plan shows (11 Units) Studios: 3 units, 1-Bedroom: 8 units, Total Bedrooms: 11. Total Unit Area: 4,202 SF

The Fifth Level Floor Plan shows (11 Units) Studios: 3 units, 1-Bedroom: 8 units, Total Bedrooms: 11. Total Unit Area: 4,198 SF

3 TRADE COMMENTS

No MEP plans provided for review.

4 ENVIRONMENTAL ASSESSMENTS

No Environmental Assessments were provided for review.

5 CONSTRUCTION SCHEDULE

No Construction Schedule was provided for review.

6 GENERAL CONTRACT

No General Contract was provided for review.

7 PROJECT BUDGET

Cumulative Project Bgt	\$9,097,735.44
Project Cost/SF	\$459.48
Project Cost/Unit	\$178,386.97

8 ACCESSIBILITY COMPLIANCE

No Accessibility Compliance details were provided for review.



9 CRITICAL ISSUES EFFECTING THE PROJECT

No Critical Issues for review.

10 DRAWING ENUMARATION

G000 - 06/19/2024, G001 - 6/19/2024, G003 - 6/19/2024, G010 - 6/19/2024, G011 - 6/19/2024, G012 - 6/19/2024, G013 - 6/19/2024, G015 - 6/19/2024, G016 - 6/19/2024, G017 - 6/19/2024, G020 - 6/19/2024, G021 - 6/19/2024, G022 - 6/19/2024, G026 - 6/19/2024, G027 - 6/19/2024, G024 - 6/19/2024, G025 - 6/19/2024, G030 - 6/19/2024, G040 - 06/19/2024, G041 - 06/19/2024, G042 - 06/19/2024, G050 - 06/19/2024, G061 - 06/19/2024, G062 - 06/19/2024, G063 - 06/19/2024, G060 - 06/19/2024, G064 - 06/19/2024, G076 - 06/19/2024, G077 - 06/19/2024, G078 - 06/19/2024, G077 - 06/19/2024, G078 - 06/19/2024, G080 - 06/19/2024, C001 - 3/27/2024, C002 - 3/27/2024, C002 - 3/27/2024, C003 - 3/27/2024, C004 - 5/15/2024, C005 - 3/27/2024, C006 - 3/27/2024, C007 - 3/27/2024, C008 - 3/27/2024, C009 - 3/27/2024, CS-0 - 3/28/2024, LC-1 - 3/28/2024, LC-2 - 3/28/2024, S201 - 5/10/2024, S202 - 5/10/2024, S203 - 5/10/2024, S204 - 5/10/2024, S205 - 5/10/2024, S206 - 5/10/2024, S207 - 5/10/2024, S208 - 5/10/2024, S209 - 5/10/2024, Z4-01 - 2/15/2024, Z4-02 - 2/15/2024, Z4-03 - 2/15/2024, Z4-04 - 2/15/2024, S301 - 5/10/2024, S302 - 5/10/2024, LI-1 03/28/24, LI-2 03/28/24, LI-3 03/28/24, LI-4 03/28/24, LI-5 03/28/24, G080 - 6/19/2024, A000 - 6/19/2024, A010 - 6/19/2024, A115 - 6/19/2024, A120 - 6/19/2024, A130 - 6/19/2024, A140 - 6/19/2024, A200 - 6/19/2024, A201 - 6/19/2024, A300 - 6/19/2024, A301 - 6/19/2024, A302 - 6/19/2024, A303 - 6/19/2024, A400 - 6/19/2024, A401 - 6/19/2024, A402 - 6/19/2024, A500 - 6/19/2024, A501 - 6/19/2024, A502 - 6/19/2024, A600 - 6/19/2024, A601 - 6/19/2024, A610 - 6/19/2024, A611 - 6/19/2024, A700 - 6/19/2024, A701 - 6/19/2024, A800 - 6/19/2024, A900 - 6/19/2024, A905 - 6/19/2024, A910 - 6/19/2024, A911 - 6/19/2024, A912 - 6/19/2024, A915 - 6/19/2024, A916 - 6/19/2024, A920 - 6/19/2024, A921 - 6/19/2024, A930 - 6/19/2024, A940 - 6/19/2024, A950 - 6/19/2024, A960 - 6/19/2024, A970 - 6/19/2024, A980 - 6/19/2024, A981 - 6/19/2024, A983 - 6/19/2024, A990 - 6/19/2024, S001 - 5/10/2024, S002 - 5/10/2024, S003 - 5/10/2024, S004 - 5/10/2024, S110 - 5/10/2024, S120 - 5/10/2024, S200 - 5/10/2024,



3 Budgeted Cost

Order #	1536575
Report Completed	August 11, 2025
Gross Building Area	19,800

#	Description of Work	Budgeted Cost	Cost/SF (19,800)	Cost/Unit (51)	Opinion	Notes
1	Architect	\$50,000.00	\$2.53	\$980.39	Estimate appears reasonable	Consultant Costs vary by Project.
2	Surveying	\$25,000.00	\$1.26	\$490.20	Estimate appears reasonable	Consultant Costs vary by Project.
3	Soil Engineer	\$30,000.00	\$1.52	\$588.24	Estimate appears reasonable	Consultant Costs vary by Project.
4	Plan Check Fees	\$30,000.00	\$1.52	\$588.24	Estimate appears reasonable	Consultant Costs vary by Project.
5	Permit Fees	\$275,000.00	\$13.89	\$5,392.16	Estimate appears reasonable	Municipal Fees vary by Location.
6	Utility Setup Fees	\$75,000.00	\$3.79	\$1,470.59	Estimate appears reasonable	Soft costs vary by project.
7	Deputy Inspections	\$35.00	\$0.00	\$0.69	Estimate appears reasonable	Soft costs vary by project.
8	Admin & Legal	\$25,000.00	\$1.26	\$490.20	Estimate appears reasonable	Consultant Costs vary by Project.
9	Structural Engineer	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Consultant Costs vary by Project.
10	Civil Engineer	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Consultant Costs vary by Project.
11	Landscape Architect	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Consultant Costs vary by Project.
12	MEP Engineer	\$20,000.00	\$1.01	\$392.16	Estimate appears reasonable	Consultant Costs vary by Project.
13	Quimby Fee	\$382,500.00	\$19.32	\$7,500.00	Estimate appears reasonable	Soft costs vary by project.
14	Insurance (builders risk)	\$50,000.00	\$2.53	\$980.39	Estimate appears reasonable	General Conditions vary by Contractor.
15	Development Fee	\$7,000.00	\$0.35	\$137.25	Estimate appears reasonable	General Conditions vary by Contractor.
16	General Conditions - Manpower (Allowance)	\$592,020.54	\$29.90	\$11,608.25	Estimate appears reasonable	General Conditions vary by Contractor.



#	Description of Work	Budgeted Cost	Cost/SF (19,800)	Cost/Unit (51)	Opinion	Notes
17	Demolition	\$79,500.00	\$4.02	\$1,558.82	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
18	Land Surveyor - Allowance	\$11,000.00	\$0.56	\$215.69	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
19	Structural Concrete	\$327,470.00	\$16.54	\$6,420.98	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
20	Spoils removal - Allowance	\$5,000.00	\$0.25	\$98.04	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
21	Lightweight Concrete	\$60,042.00	\$3.03	\$1,177.29	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
22	Concrete Masonry Unit (CMU)	\$143,700.00	\$7.26	\$2,817.65	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
23	Stone Facing - Brick Veneer	\$13,055.00	\$0.66	\$255.98	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
24	Structural Steel Fabricator Contractor	\$33,988.02	\$1.72	\$666.43	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
25	Elevator Steel - Allowance	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
26	Decorative Metals - Allowance	\$75,000.00	\$3.79	\$1,470.59	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
27	Glass Railing - Allowance	\$35,000.00	\$1.77	\$686.27	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
28	Rough Carpentry - Material & Labor	\$970,000.00	\$48.99	\$19,019.61	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
29	EBM System - Allowance	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
30	Below Grade Water Proofing	\$7,600.00	\$0.38	\$149.02	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
31	Above Grade Water Proofing	\$46,600.00	\$2.35	\$913.73	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
32	Thermal Insulation	\$58,250.00	\$2.94	\$1,142.16	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
33	Roofing	\$74,200.00	\$3.75	\$1,454.90	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
34	Sheet Metal Contractor - Allowance	\$70,000.00	\$3.54	\$1,372.55	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
35	Firestopping - Allowance	\$3,000.00	\$0.15	\$58.82	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.



#	Description of Work	Budgeted Cost	Cost/SF (19,800)	Cost/Unit (51)	Opinion	Notes
36	Joint Sealants - Allowance	\$5,000.00	\$0.25	\$98.04	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
37	Doors and Frames	\$182,256.00	\$9.20	\$3,573.65	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
38	Windows - Material	\$81,726.81	\$4.13	\$1,602.49	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
39	Windows - Installation	\$25,900.00	\$1.31	\$507.84	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
40	Entrances, Storefronts, and Curtain Walls	\$8,755.00	\$0.44	\$171.67	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
41	Drywall and metal stud framing	\$437,990.00	\$22.12	\$8,588.04	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
42	Painting and Coating	\$130,000.00	\$6.57	\$2,549.02	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
43	Flooring	\$118,463.00	\$5.98	\$2,322.80	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specification provided for Review.
44	Cement Plastering - Stucco - Allowance	\$275,000.00	\$13.89	\$5,392.16	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
45	Signages	\$11,972.11	\$0.60	\$234.75	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
46	Bathroom Accessories	\$13,056.00	\$0.66	\$256.00	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
47	Mirrors	\$10,840.00	\$0.55	\$212.55	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
48	Fire extinguishers - allowance	\$3,000.00	\$0.15	\$58.82	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
49	Mailboxes	\$14,136.00	\$0.71	\$277.18	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.



#	Description of Work	Budgeted Cost	Cost/SF (19,800)	Cost/Unit (51)	Opinion	Notes
50	Appliances - Material & Installation	\$129,875.28	\$6.56	\$2,546.57	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specification provided for Review.
51	Countertops - Allowance	\$153,000.00	\$7.73	\$3,000.00	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specification provided for Review.
52	Elevators	\$150,000.00	\$7.58	\$2,941.18	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
53	Trash Chutes	\$37,409.00	\$1.89	\$733.51	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
54	Fire Sprinklers	\$187,300.00	\$9.46	\$3,672.55	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
55	Plumbing - Rough and Finish - Allowance	\$900,000.00	\$45.45	\$17,647.06	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
56	Water Submeter - Allowance	\$5,000.00	\$0.25	\$98.04	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
57	HVAC equipment & Ducting	\$394,800.00	\$19.94	\$7,741.18	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
58	Electrical rough and finish - Allowance	\$650,000.00	\$32.83	\$12,745.10	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
59	Low Voltage - Structured Cabling	\$32,000.00	\$1.62	\$627.45	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
60	2 - way communication system (AOR)	\$19,000.00	\$0.96	\$372.55	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
61	ERRCS / DAS system	\$51,000.00	\$2.58	\$1,000.00	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
62	Access Control / Main Telephone Entry / Door Chimes - Allowance	\$5,000.00	\$0.25	\$98.04	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
63	Fire Detection and Alarm	\$47,250.00	\$2.39	\$926.47	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
64	Excavation and Fill	\$57,350.00	\$2.90	\$1,124.51	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.



#	Description of Work	Budgeted Cost	Cost/SF (19,800)	Cost/Unit (51)	Opinion	Notes
65	Fine Grading - Allowance	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
66	Site concrete, Site walkways Site Stairs	\$10,500.00	\$0.53	\$205.88	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
67	Offsite Concrete - Allowance	\$10,000.00	\$0.51	\$196.08	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
68	Striping - Allowance	\$5,000.00	\$0.25	\$98.04	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
69	Permeable Pavers	\$28,619.55	\$1.45	\$561.17	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
70	Irrigation system - Allowance	\$50,000.00	\$2.53	\$980.39	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
71	Sanitary Sewerage - Allowance	\$50,000.00	\$2.53	\$980.39	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
72	GC Fee	\$689,162.43	\$34.81	\$13,512.99	Estimate appears reasonable	General Contractor fees vary by Contractor.
73	Contractor's Contingency	\$482,413.70	\$24.36	\$9,459.09	Estimate appears reasonable	Contingency varies by project estimated 5.3% of the overall budget.
TOTAL PROJECT BUDGET		\$9,097,735.44	\$459.48	\$178,386.97		

4 Potential Added Costs

POTENTIAL ADDED COSTS

No potential added costs for review

Total Budget Review is an analysis based on the Cost Breakdown, Structural and Architectural plans as enumerated. Any plans not specifically enumerated, municipal or owner changes and any other owner or developer requirements are not included.