




INTERNAL CONSTRUCTION FEASIBILITY REVIEW

07/15/25

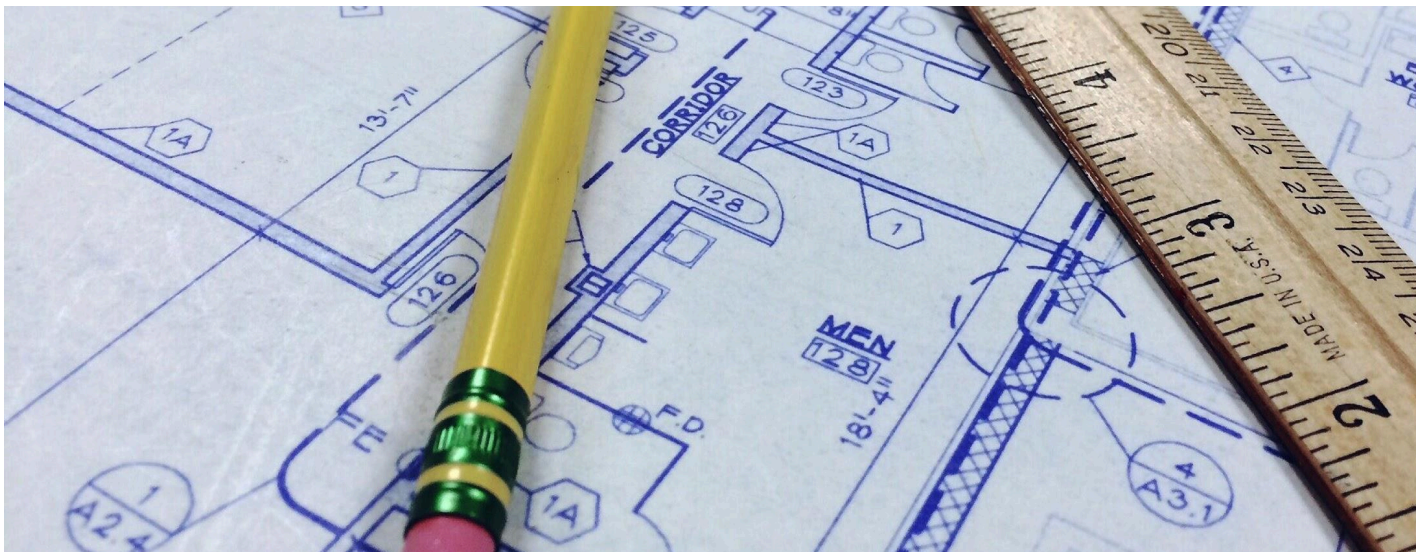

666-676 Mike McCarthy Way, Ashwaubenon, WI 54304

Sponsor:	Merge Urban Development
Borrowing Entity:	Common Place on Mike McCarthy Way LLC
Approval status:	Approved
Report by:	Cynthia Moreno, Construction Underwriting

Executive Summary

Merge Urban Development was founded by Brent Dahlstrom in 2018. While their primary focus is ground up multi unit developments in Wisconsin, they are also active in Iowa as a secondary market. Brent also operates a larger rental portfolio of over 1,400 units. Their primary focus is on Opportunity Zones, primarily for the tax incentives. Merge is licensed as a General Contractor in Wisconsin and Minnesota.

This report is for The Common Place Phase II mixed-use development in Ashwaubenon, WI. Proposed construction is for continued horizontal development of the full 6 acre site with additional vertical development of a 5-story Structure with 2,904 sf of Restaurant space, 2446 sf of Commercial Space and 91 residence units (Studio, 1BR & 2BR) for a cumulative 81,943 gross sq ft. Merge Urban Development is an Owner Builder. At the moment, the Construction Underwriting Department has a draw hold for Subcontracts through Drywall with 0% of trades bought out. The cost spent on the file is mostly for soft costs.

The Genesis Construction team has obtained a third-party feasibility, which has found overall cost to be reasonable. Therefore, the Genesis Capital Construction Department is in full support of funding this loan and feels that the Sponsor is proficient, knowledgeable and utilizing all appropriate resources to complete the project without issues.

The Genesis Capital Construction Department has received and reviewed a third-party feasibility from Trinity. The report concluded that the overall project risk rating is appropriate for the scope of work and meets best practice and is Recommended for Approval. The Genesis Capital Construction Department has reviewed all pertinent construction documents provided by the Sponsor and agrees with the third-party feasibility and has Approved the loan.

The overall project timeline is estimated to be 15 months with 14 months remaining and is deemed appropriate to substantially complete the subject project based on the Sponsor's track record and market standards.

For further analysis and additional information on the project, please see subsequent third-party review.

The Construction Department is draw holding for the following: Approved Plans, Approved Permits, Subcontractor Contracts, Construction Timeline

Loan Summary

Loan Type:	Ground-up Construction
Rehab Amount:	\$17,015,410.04
Construction Holdback:	\$15,177,319.46
Project Cost per Square Foot (GSF):	\$207.65
Project Cost per Structure:	\$17,015,410.04
Project Cost per Unit:	\$186,982.53
Total Contingency Included:	7.0%
Project Complete Percentage:	
Budget Determination:	The budget presented accurately reflects the scope of the project and the cost allocations have been determined to meet the minimum threshold to complete.
Additional Comments:	None

Plan Status:	Submittal/Plan Check (PC) - The plans received are sufficient to support the project scope as needed.
Permits Status:	The borrower has not yet obtained permits for this loan.
Permit Timeline:	Sponsor plans to have permits within 30 days after the funding of the loan.

Finished Product Details

Property Description:	Horizontal Land Improvement + Multifamily building in Ashwaubenon, WI
Number of Units:	91
Number of Stories:	Five-story
Gross Buildable SF:	81,943.00



Project Review

G25069857 - 666-676 Mike
McCarthy Way

PROJECT

666-676 Mike McCarthy Way
Ashwaubenon, WI 54304

Loan#: G25069857 - 666-676 Mike
McCarthy Way

LENDER

Genesis Capital

Ordered by: Fund Control

BORROWER

Joy Brenner

BUILDER

This document may contain proprietary information. Please do not reveal any of its contents to anyone not directly responsible for evaluating it without first obtaining written permission from Trinity Inspection Services, LLC. © 2013 Trinity Inspection Services, LLC. Trademarks, Service marks, Copyrights are the property of TRINITY INSPECTION SERVICES, LLC. Business processes, technology or programming code may be protected under a U.S. Patent, Patent Pending or Registered Copyright. Additionally, this service is provided exclusively by Trinity Inspection Services, LLC and is EXCLUSIVELY responsible and liable for the scope of work to be completed, terms of the original contract, work flow processes, service levels, productivity measures, timelines, deliverables and all acts and/or omissions associated with this particular service.



1 Summary

Project Name	G25069857 - 666-676 Mike McCarthy Way
Project Address	666-676 Mike McCarthy Way Ashwaubenon WI 54304
Scope of Work	New Construction Project Review
Lender	Genesis Capital

Good afternoon, Fund Control Team!

I hope the Team is all well today!

This is our report for The Common Place Phase II mixed-use development in Ashwaubenon, WI. Proposed construction is for continued horizontal development of the full 6 acre site with additional vertical development of a 5-story Structure with 2,904sq ft of Restaurant space, 2,446 sq ft of Commercial Space and 91 residence Units (Studio, 1BR & 2BR) for a cumulative 81,943 gross square feet.

The Project Drawings provided for review include Civil, Landscape, Architectural and Structural Plans that are well detailed, dimensioned and more than appropriate to construct the Project as proposed. These Drawings are mostly dated from mid 2023 with 1 Revision noted as 'Addenda 01'.

The initial Project Budget follows a Sequential format that totals \$20,043,194.00 with \$2,978,870 paid to date and \$2,604,072.00 allocated as 'Owner Provided' line items with \$14,460,252.00 remaining. Line Item Costs allocated include are primarily Hard Costs with Contractor Costs, Select Soft Costs and Consultant Costs. Municipal Fees and Transaction Costs typical of comparable projects with similar scopes of work were not specifically allocated funds and are not included for review in this report. The total does not include a Contingency, which is a concern.

The Line Item Analysis that follows shows that no individual line items appear HIGH or LOW compared to similarly scoped Projects. In addition, there are no 'Potential Added Costs'.

The Primary Metrics I track for comparable Mixed-Use Construction projects are Cost per Square Foot and Cost per Unit. The Metrics for this build is \$244.60/Sq Ft (\$176.47/Sq Ft for the remaining Budget) and \$220,254.88/Unit (\$158,903.87/Unit for the remaining Budget). Both of these are marginally low, but clarified by the assumed "white box" finish of the Commercial spaces. Therefore, the Metrics are achievable compared to similarly scoped projects in the Market pending select finish specifications not provided for review.

In Summary, the project Drawings are buildable, the Primary Metrics are clarified achievable, but there is no Contingency. Therefore, this project as presented for Review is achievable with an elevated risk to the Lender to fund as budgeted. Inclusion of a 5% to 10% of Remaining Budget for a Contingency would reduce the overall risk to negligible.

Upon review, if you or a member of your Team have any questions about this report, please let me know. Otherwise, we thank you for partnering with Trinity and wish you luck moving forward with this Project!

Kindest Regards,

Dave Taylor
VP-Commercial



2 Executive Summary

1 GEOTECHNICAL REPORT

A 'revised' Soils Report prepared by professional Service Industries, Inc. out of Kaukauna, WI (PSI Report # 0094-1890-R-2) dated 04/10/23 was provided for Review.

A total of 10 soil test borings were performed to depths ranging from 5' to 40' below existing grade from a truck-mounted rotary drilling rig. Groundwater was observed at depths ranging from 13.5' to 25'

Recommendations endorse conventional spread footings and conventional slab-on-grade construction. However, fill materials are not suitable for foundation support. Therefore, all foundations must bear upon suitable natural soils or newly placed compacted structural fill. Undercuts of up to 2' may be necessary.

Net allowable soil pressure recommended is 2,000 psf.

2 PLANS AND CONTRACTS DOCUMENTS

CIVIL DRAWINGS

Civil Drawings prepared by Graef Engineering out of Green Bay, WI were provided for review.

Plans include the Site TOPO, Site Demo Plan, Site Layout Plan, Site Grading Plan, Site Paving Plan and Construction Details.

The Site Plan shows the Building frontage along Mike McCarthy Way. Plan East features a subterranean ADS storm drainage detention system beneath a fully paved & striped parking lot with more parking to the rear of the Site and Concrete Paver section beyond a segmented block retaining wall to the plan West.

Erosion Control measures include a Stabilized Construction entrance with 12" minimum stone aligned with the hard surface public road, a 20" embedded Silt Fence and inlet protection.

LANDSCAPE DRAWINGS

Landscape Drawings prepared by Graef Engineering out of Green Bay, WI were provided for review.

Plantings include 10" 8-12" Ornamental Trees, 13ea 2.5" BB and 3ea 2.0" BB Shade Trees, 29ea 36" ht, 35ea 24" ht, 25ea 24" spread and 15ea 12" ht Shrubs, 10ea 30" ht and 14ea 18" ht Evergreen Shrubs, 157ea 1-gal and 232ea 4" pot ornamental grasses and 243ea 1-gal perennials.

STRUCTURAL DRAWINGS

Structural Drawings prepared by Spire Engineering, Inc out of Milwaukee, WI were provided for Review.

Plans include Structural Notes & Schedules, a Foundation Plan, Floor Framing Plans, Roof Framing Plans, Precast Loading Plan, Shear Wall/Hold Down Plan, Foundation Details, PreCast & cMU Framing Details and Wood Framing Details.

Design Criteria: Dead Loads (Brick Veneer=40psf, Wood Floor=25psf, Wood Roof=20psf and 12" Precast Planks=130psf), Live Loads



(Units=40psf, Balconies=40psf, Retail & Restaurant=100psf, Stairways, Corridors, Lobbies & Common Areas=100psf and Roof=20psf). Basic Wind Speed Rating is 115MPH, Risk Category "B". Seismic Risk Category "II", Site Class "D".

Continuous Footings are 1'6" to 10' at 1' to 1'6" deep with Pad Footings from 3' square by 1' deep to 15' square by 2'6" deep. Piers are 16"x24", 24"x24" and 27"x27". Slab on Grade is 4".

ARCHITECTURAL DRAWINGS

Architectural Drawings prepared by Continuum Architects + Planners, S.C. out of Milwaukee, WI (Project # 220806) were provided for review.

Plans include General Information, Partition Types, Life Safety Plans, an Architectural Site Plan & Details, Floor Plans, Reflected Ceiling Plans, Exterior Elevations, Window Types, Building & Wall Sections, Wall Sections, Exterior Details, Enlarged Stair Plans & Sections, Enlarged Elevator & Trash Chute Sections, Enlarged Unit Plans, Interior Elevations, Door Schedule & Details, Schedules and Room Finish Schedule.

The Level 01 Floor Plan features a Restaurant with demised Commercial Space, Stair-2, a Trash Room, a Bike Parking room, a Laundry Room, 2 designated Restrooms, a Parcel Room, a Mail area off the primary Lobby with dual Vestibule entries, a Water Room, an Elevator Lobby, an Office, a Mechanical Closet and 7 residential Units plus Stair-1.

The Level 02 Floor Plan features an Elevator Lobby, Stair-1, Stair-2 and 21 residential Units, 5 of which include private Balconies.

The Level 03 Floor Plan features an Elevator Lobby, Stair-1, Stair-2 and 21 residential Units, 5 of which include private Balconies.

The Level 04 Floor Plan features an Elevator Lobby, Stair-1, Stair-2 and 21 residential Units, 5 of which include private Balconies.

The Level 05 Floor Plan features an Elevator Lobby, Stair-1, Stair-2 and 21 residential Units, 5 of which include private Balconies.

Exterior Elevations feature a 1F Masonry Brick Veneer (2 types) with primary finish a vertical format Metal Panel and horizontal & smooth metal panel accents. Balconies receive a pre-manufactured aluminum assembly with glazed guardrail panels.

3 TRADE COMMENTS

No Electrical Drawings were provided for review.

No Mechanical Drawings were provided for review.

No Plumbing Drawings were provided for review.

4 ENVIRONMENTAL ASSESSMENTS

No Environmental Assessment was provided for Review.

5 CONSTRUCTION SCHEDULE

A Critical Path Construction Schedule was provided for Review with commencement slated for 09/01/25 with a duration of 329 days. Highlights include Structural Concrete scheduled for 10/09/25, Framing duration of 95 days, Finishes to begin 06/18/26 and Closeout scheduled for 11/24/26.



6 GENERAL CONTRACT

No General Construction Contract was provided for Review.

7 PROJECT BUDGET

Cumulative Project Bgt	\$18,124,235.00
Project Cost/SF	\$221.18
Project Cost/Unit	\$199,167.42
Project Cost/SF	\$221.18
Project Cost/Unit	\$199,167.42

8 ACCESSIBILITY COMPLIANCE

Accessibility Compliance measures addressed in plan pages A001 were provided for Review.

Details include Maneuvering Clearances, Mounting Heights and ADA Clearances.

9 CRITICAL ISSUES EFFECTING THE PROJECT

None.

10 DRAWING ENUMARATION

T000 05/15/23, C100 05/15/23, C101 05/15/23, C200 05/15/23, C300 05/15/23, C400 05/15/23, C500 05/15/23, C600 05/15/23, C601 05/15/23, C602 05/15/23, C603 05/15/23, L100 05/15/23, L900 05/15/23, A001 05/15/23, A003 05/15/23, A004 05/15/23, A010 05/15/23, A011 05/15/23, A022 05/15/23, A023 05/15/23, A024 05/15/23, A201 05/15/23, A202 05/15/23, A203 05/15/23, A205 05/15/23, A206 05/15/23, A301 05/15/23, A302 05/15/23, A303 05/15/23, A400 05/15/23, A401 06/15/23, A402 06/15/23, A403 06/15/23, A501 06/15/23, A502 05/15/23, A503 06/15/23, A504 05/15/23, A510 05/15/23, A511 05/15/23, A512 05/15/23, A600 05/15/23, A601 05/15/23, A602 06/15/23, A603 05/15/23, A604 06/15/23, A605 06/15/23, A606 06/15/23, A607 06/15/23, A700 06/15/23, A701 06/15/23, A702 05/15/23, A703 06/15/23, A710 06/15/23, A800 05/15/23, A801 06/15/23, A900 05/15/23, S000 06/15/23, S001 05/15/23, S100 05/15/23, S101 06/15/23, S102 06/15/23, S103 06/15/23, S104 06/15/23, S105 05/15/23, S120 05/15/23, S130 05/15/23, S200 05/15/23, S300 06/15/23, S400 06/15/23, S401 06/15/23, S402 05/15/23.



3 Budgeted Cost

Order #	1529149
Report Completed	July 15, 2025
Gross Building Area	81,943

#	Description of Work	Budgeted Cost	Cost/SF (81,943)	Cost/Unit (91)	Opinion	Notes
1	Cast-In-Place Concrete	\$550,250.00	\$6.72	\$6,046.70	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
2	Concrete Finishing	\$5,019.00	\$0.06	\$55.15	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
3	Precast Concrete	\$551,492.00	\$6.73	\$6,060.35	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
4	Cast Underlayment	\$158,324.00	\$1.93	\$1,739.82	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
5	Unit Masonry	\$469,350.00	\$5.73	\$5,157.69	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
6	Structural Metal Framing	\$97,921.00	\$1.19	\$1,076.05	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
7	Aluminum Balconies	\$229,126.00	\$2.80	\$2,517.87	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
8	Rough Carpentry	\$1,694,803.00	\$20.68	\$18,624.21	Estimate appears reasonable	Budgeted Cost/Sq Ft is comparable to similarly scoped Projects.
9	Wood Trim	\$71,579.00	\$0.87	\$786.58	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
10	Damproofing and Waterproofing	\$138,951.00	\$1.70	\$1,526.93	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
11	Thermal Insulation	\$237,300.00	\$2.90	\$2,607.69	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
12	Spray Applied Air/Vapor Barriers	\$76,209.00	\$0.93	\$837.46	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.



#	Description of Work	Budgeted Cost	Cost/SF (81,943)	Cost/Unit (91)	Opinion	Notes
13	Siding & Soffit Panel Systems	\$1,063,724.00	\$12.98	\$11,689.27	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
14	Roofing, Flashings, & Accessories	\$425,308.00	\$5.19	\$4,673.71	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
15	Applied Fireproofing	\$20,454.00	\$0.25	\$224.77	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
16	Doors, Frames, & Hardware	\$429,628.00	\$5.24	\$4,721.19	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
17	Specialty Doors and Frames	\$24,897.00	\$0.30	\$273.59	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
18	Sectional Doors	\$5,908.00	\$0.07	\$64.92	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
19	Entrances, Storefronts, and Curtain Walls	\$274,169.00	\$3.35	\$3,012.85	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
20	Windows & Patio Doors	\$510,125.00	\$6.23	\$5,605.77	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
21	Glazing	\$44,495.00	\$0.54	\$488.96	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
22	Plaster and Gypsum Board	\$937,952.00	\$11.45	\$10,307.16	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
23	Tiling	\$241,668.00	\$2.95	\$2,655.69	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly



#	Description of Work	Budgeted Cost	Cost/SF (81,943)	Cost/Unit (91)	Opinion	Notes
23	Tiling	\$241,668.00	\$2.95	\$2,655.69	Estimate appears reasonable	scoped Projects. No Specifications provided for Review.
24	Acoustical Ceilings	\$41,013.00	\$0.50	\$450.69	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
25	Flooring	\$273,053.00	\$3.33	\$3,000.58	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
26	Fluid-Applied Flooring	\$12,212.00	\$0.15	\$134.20	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
27	Painting and Coating	\$496,710.00	\$6.06	\$5,458.35	Estimate appears reasonable	Budgeted Cost/Sq Ft is comparable to similarly scoped Projects.
28	Signage	\$12,280.00	\$0.15	\$134.95	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
29	Toilet Accessories	\$43,659.00	\$0.53	\$479.77	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
30	Emergency Key Cabinets	\$735.00	\$0.01	\$8.08	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
31	Fire Protection Specialties	\$6,248.00	\$0.08	\$68.66	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
32	Postal Specialties	\$23,783.00	\$0.29	\$261.35	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
33	Closet and Utility Shelving	\$20,756.00	\$0.25	\$228.09	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly



#	Description of Work	Budgeted Cost	Cost/SF (81,943)	Cost/Unit (91)	Opinion	Notes
33	Closet and Utility Shelving	\$20,756.00	\$0.25	\$228.09	Estimate appears reasonable	scoped Projects. No Specifications provided for Review.
34	Residential Appliances	\$409,540.00	\$5.00	\$4,500.44	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
35	Window Treatments	\$102,953.00	\$1.26	\$1,131.35	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
36	Elevators	\$160,326.00	\$1.96	\$1,761.82	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
37	Facility Chutes	\$21,273.00	\$0.26	\$233.77	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Specifications provided for Review.
38	Fire Suppression	\$248,274.00	\$3.03	\$2,728.29	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
39	Plumbing	\$1,039,500.00	\$12.69	\$11,423.08	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Plumbing Plans, Schedules or Details provided for Review.
40	HVAC	\$1,079,691.00	\$13.18	\$11,864.74	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Mechanical or HVAC Plans, Schedules or Details provided for Review.
41	Electrical	\$2,202,888.00	\$26.88	\$24,207.56	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. No Electrical Plans, Schedules or Details provided for Review.
42	Earthwork	\$381,110.00	\$4.65	\$4,188.02	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
43	Site Concrete	\$270,900.00	\$3.31	\$2,976.92	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.



#	Description of Work	Budgeted Cost	Cost/SF (81,943)	Cost/Unit (91)	Opinion	Notes
44	Site Furnishings	\$2,933.00	\$0.04	\$32.23	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. No Specifications provided for Review.
45	Planting	\$151,724.00	\$1.85	\$1,667.30	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects.
46	Utilities	\$334,320.00	\$4.08	\$3,673.85	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects.
47	Project Requirements	\$270,861.00	\$3.31	\$2,976.49	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. General Conditions vary by Contractor.
48	Construction Materials Testing	\$22,412.00	\$0.27	\$246.29	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. Consultant Costs vary by Project.
49	Field Engineering	\$9,104.00	\$0.11	\$100.04	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. Consultant Costs vary by Project.
50	Final Cleaning	\$61,688.00	\$0.75	\$677.89	Estimate appears reasonable	Budgeted Cost/Unit is comparable to similarly scoped Projects. General Conditions vary by Contractor.
51	Allowances	\$249,380.00	\$3.04	\$2,740.44	No Opinion	Line Item description is too vague.
52	General Conditions - (Personnel)	\$1,174,837.00	\$14.34	\$12,910.30	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. General Conditions vary by Contractor.
53	Insurance 1.00%	\$173,828.00	\$2.12	\$1,910.20	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. Soft Costs vary by Project.
54	Construction Management Fee 3.23%	\$567,592.00	\$6.93	\$6,237.27	Estimate appears reasonable	Budgeted Cost is comparable to similarly scoped Projects. Consultant Costs vary by Project.
TOTAL PROJECT BUDGET		\$18,124,235.00	\$221.18	\$199,167.42		

4 Potential Added Costs



POTENTIAL ADDED COSTS

None.

Total Budget Review is an analysis based on the Cost Breakdown, Civil, Landscaping, Structural and Architectural plans as enumerated. Any plans not specifically enumerated, municipal or owner changes and any other owner or developer requirements are not included.